


# STRINGING INSTRUCTIONS



## EXO<sup>3</sup> ATTACK

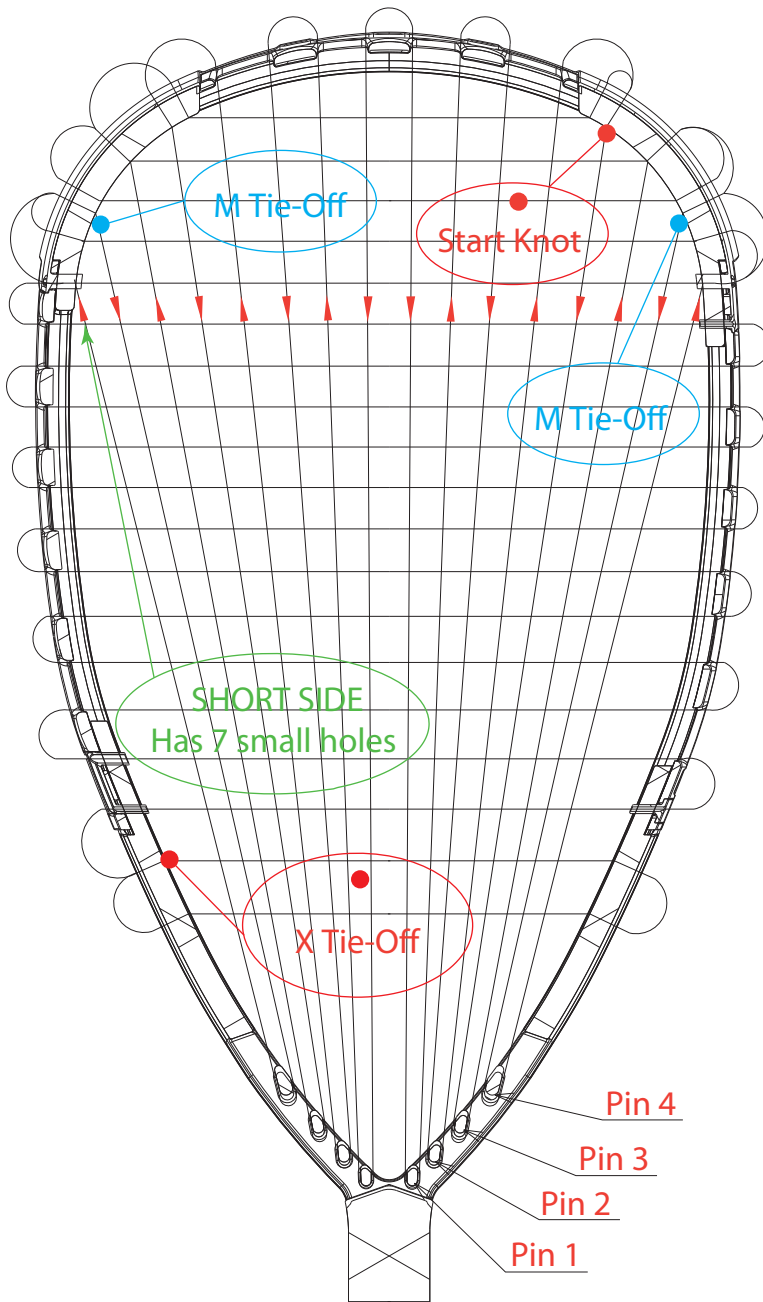

## String Instructions

### 2-Piece Stringing

String tension: 28-38 Lbs

String pattern: 16 x 19 Power Ring 8

Length: 22' Mains x 17' Crosses

### Mains

Start at head. M's skip at 5H, 8H and 10H with double barrel grommets at 7H and 11H.

\* Mount the racquet to the stringing machine with the Ektelon logo on the handle facing up.

### Short Side

1. Feed 11' of string from 1H-L to left Power Ring #1; continue around left PR #1 to 2H-L
2. Place left clamp on string at 1H-L (do not pull tension on this string yet)
3. Feed other end of string from 1H-R to right PR #1, continue around right PR #1 to 2H-R
4. Pull tension and clamp (right clamp), pull tension at 2H-L and move left clamp to 2H-L
5. 3H-L to left PR #2
6. Left PR #2 to 4H-L (tension and clamp)
7. 3H-R to right PR #2
8. Right PR #2 to 4H-R (tension and clamp)
9. 6H-L to left PR #3
10. Left PR #3 to 7H-L lower double barrel grommet (tension and clamp)
11. 6H-R to right PR #3
12. Right PR #3 to 7H-R upper double barrel grommet (tension and clamp)
13. 9H-L to left PR #4
14. Left PR #4 to 11H-L upper double barrel grommet (tension and clamp) & tie off at 9H-L
15. 9H-R to right PR #4
16. Right PR #4 to 11H-R lower double barrel grommet (tension and clamp) & tie off at 9H-R

### Crosses

1. Tie starting knot at 6H-R.
2. Start at 5H-R and weave across to 5H-L, then down to 7H-L and across to 7H-R.
3. Continue installing cross strings conventionally. Finish and tie off at 2T-L.

\* It is recommended to use a table-brake when stringing cross strings on all EXO3 Racquets.